




# BACKHOE

## DUAL PURPOSE ROADHEADER/BACKHOE

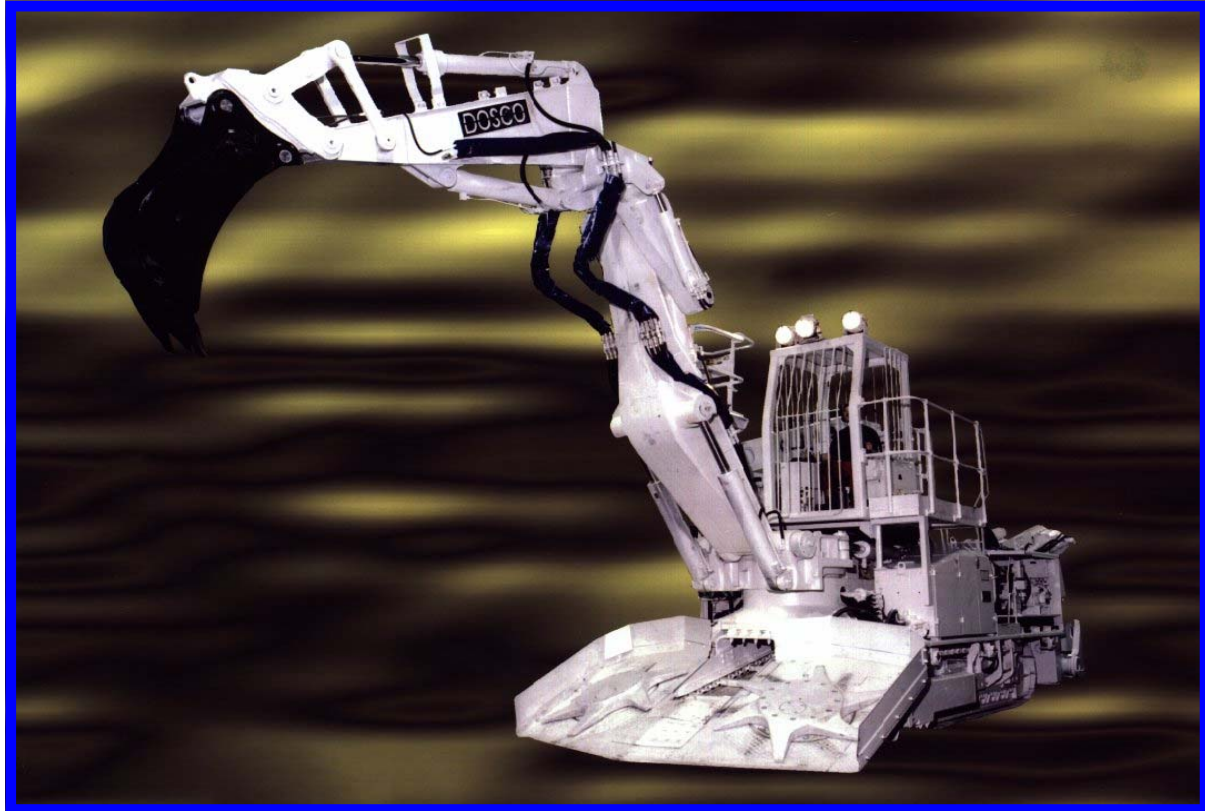

Mk 2B BACKHOE

<b>Mk 2B BACKHOE OUTLINE DATA</b>	<b>TYPICAL SPECIFICATION</b>
<b>Machine Weight (Base Machine)</b>	<b>44 tonnes</b>
<b>Total Power (Standard Machine)</b>	<b>From 112 kW</b>
<b>Bucket Capacity</b>	<b>1.4m<sup>3</sup></b>
<b>Hydraulic System Working Pressure</b>	<b>140/300 bar</b>
<b>Tracking Speeds – Sumping/Flitting</b>	<b>0.06/0.29 m/sec</b>
<b>Ground Pressure</b>	<b>1.39 kg/cm<sup>2</sup></b>

The Dosco Mk 2B Backhoe offers the contractor flexibility in one machine with the flexibility to convert to either Roadheader or Backhoe on site.

In Backhoe mode the machine has a maximum reach of 13.1 m and a maximum width of 9.8 m. Machines can be Electro/Hydraulically powered from a trailing cable or Diesel/Electric.



**YOUR PARTNER  
FOR ALL ROUND QUALITY AND RELIABILITY**





A central heavy duty chain conveyor with high throat clearances and optional spinners or gathering arms ensures optimum loading efficiency.



**Mk 2B BACKHOE in Roadheader mode**



**Mk 2B BACKHOE fitted with access platform arm option**

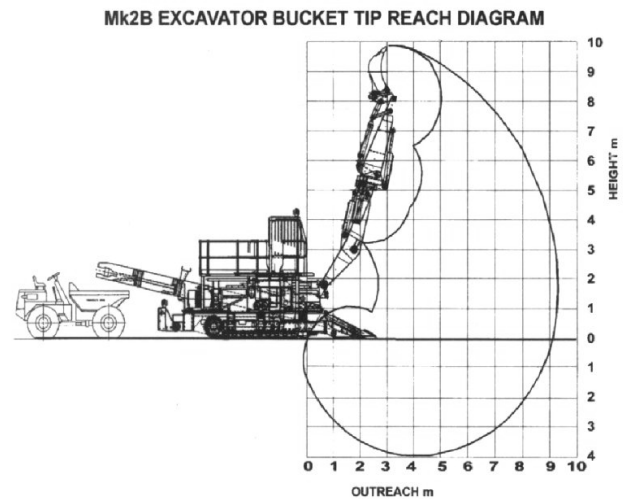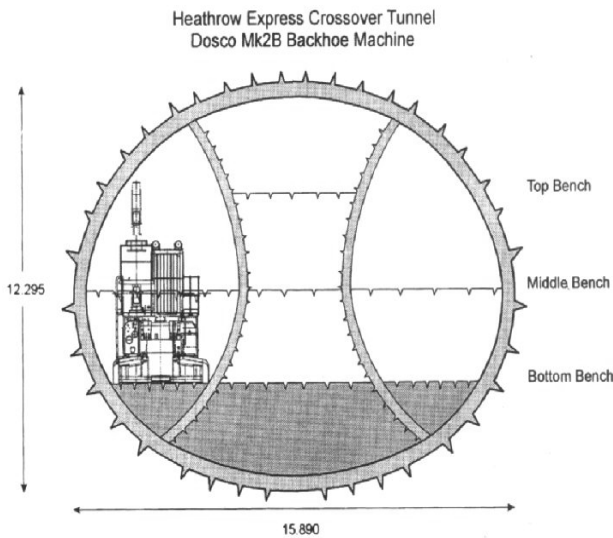

**OPTIONS include:**

- **Gas Detection Systems**
- **Alternative discharge Arrangement** – fixed rear discharge or articulating conveyor
- **Gathering by Spinners or Arms**

**OPTIONS include:**

- **Sumping Apron** – enables better clearance of cut material
- **Hydraulic Winch Left Hand or Right Hand**

Document Issue 1 Revision 2 05/08/03

PLEASE NOTE – Data is intended as a guide only as machines may vary according to specification requirements.



**DOSCO OVERSEAS ENGINEERING LTD**  
Ollerton Road, Tuxford, Newark Nottinghamshire, NG22 0PQ England  
Telephone: + 44 (0) 1777 870621 Facsimile: + 44 (0) 1777 871580  
E-mail: info@dosco.co.uk Website: www.dosco.co.uk



A member of the Amco Corporation Plc group of companies.

